



Battery Pack Attachment

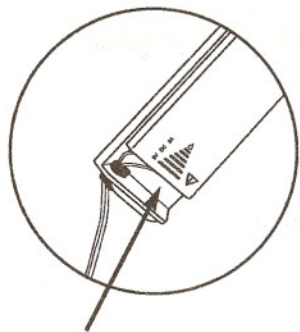



To open battery pack slide top.



Affix velcro (provided) to underside of battery pack as shown.

or

Attach to surface using mounting screws (not provided).

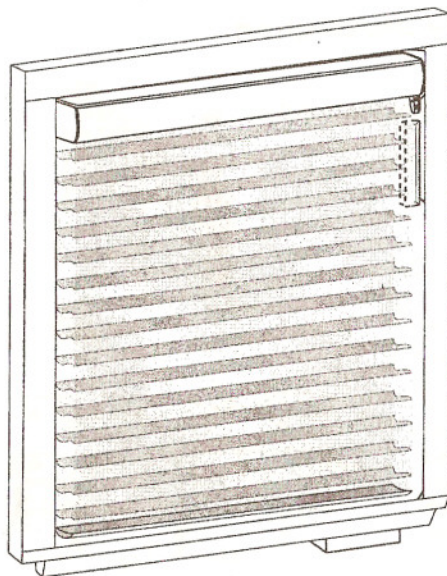


Mounting Options

Attach to:

- outside of window frame
- or
- window frame behind shade
- or
- bottom of window frame (48" and 96" battery pack wires available)




Manual button



Optional Satellite Eye

Remote Control Battery Installation

1. Using a coin or a flathead screwdriver, slide edge into the back slot of the remote control. (see illustration)
2. Twist coin or screwdriver and the remote case will open.
3. Install 3 AA alkaline batteries into bottom half of the remote control. The battery orientation is shown in the bottom of the remote case.

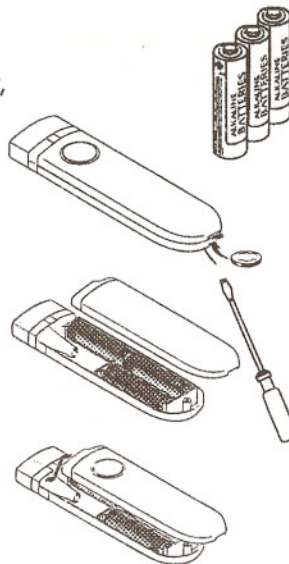

CAUTION:

Do not use lithium batteries in remote control.



4. Place front edge of the top cover under the lip of the cap and slide the cover forward to the stop.
5. Close the rear of the remote by squeezing the housings together.

Remote Control Cat-Eye Filter (optional)

In applications where shadings are installed close together, you may wish to use the optional cat-eye filter.

CAUTION:

Using this filter will reduce the operating distance of the remote control, but will give you better control of individual shades.

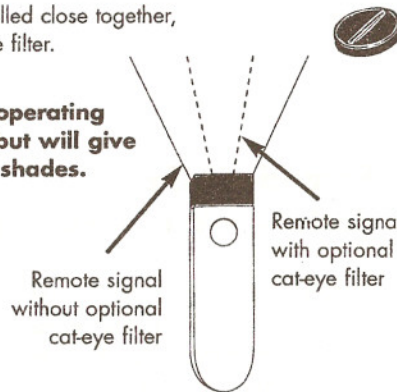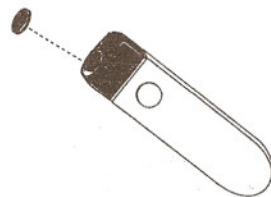

Shade 1		Shade 1	Shade 2	
	If shadings are one above the other, place filter on remote with cat eye (slit) in a horizontal position.			
			If shades are side-by-side place filter on remote with cat eye (slit) in a vertical position.	

Trouble Shooting Tips

1) Motor does not operate:

- **Check the connection between the motor and the battery cable.** Is cable plugged in? DO NOT FORCE. Plugs in easily.
- **Check battery orientation;** are one or more of the batteries backwards?
- **Are the batteries in the battery cartridge fresh?** If using alkaline batteries, batteries should be changed every 12 months. If using lithium batteries, batteries should be changed every 18-24 months, depending upon usage.

2) Remote control fails to operate motor:





- **Check battery orientation in the remote control.** Is one of the batteries backwards? (Remote operates with three AA alkaline batteries, do not use lithium batteries.)
- **Check battery connection in the remote control.** Are the batteries firmly seated in the remote control?
- **Are the batteries in the remote control fresh?** Look inside the eye of the remote control and push the operation button. Do you see a red light? If so, your batteries are functional.

3) Motor runs very slowly:

- **Check battery orientation, is one battery in backwards?** Unit will operate when one battery is installed incorrectly, however blind will run very slowly.
- **Are the batteries fresh?**

For optimal customer satisfaction, the use of lithium batteries is recommended in all battery-operated systems (excluding remote controls). The use of lithium batteries helps ensure long-term battery life, up to three years, depending on usage. Extreme heat conditions may cause alkaline batteries to drain very quickly. Lithium batteries are able to withstand higher heat extremes than alkaline batteries, and will not drain as quickly.

Optional Battery Wand Installation

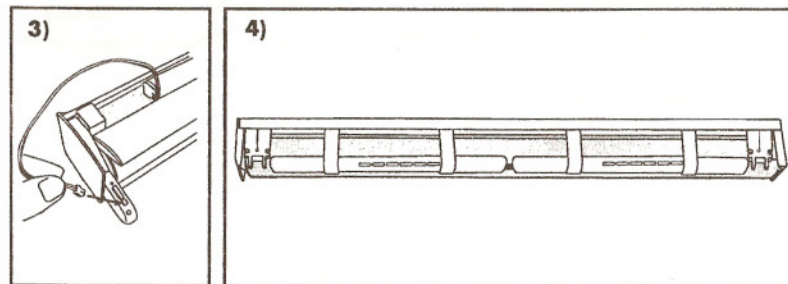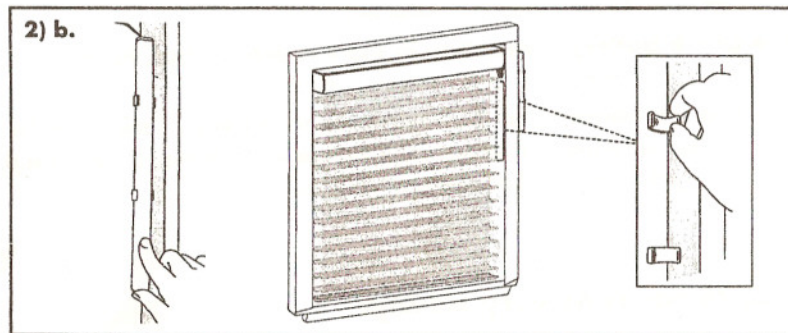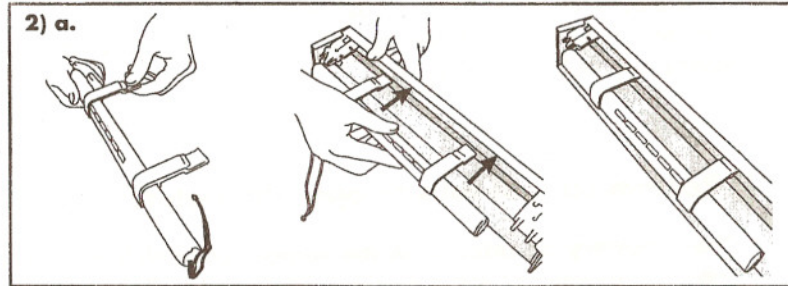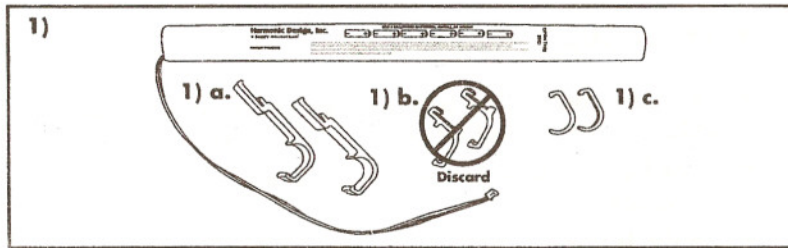

1) Your new battery wand comes with three styles of mounting clips. Choose the correct mounting brackets for your type of shading.

- a. Window Shadings Clips
- b. Additional Clips (Discard)
- c. Wall Mount Clips

2) a. Attach the battery wand to the mounting clips, approximately 8 inches apart. Attach the clips to the shading as pictured.

b. Wall Mount – attach clips to surface using included screws. Attach battery wand.

3) Once battery wand is securely seated in the appropriate mounting clip, plug the battery cable into the back of the motor. **Do not force**, cable will plug in easily. Install shading according to manufacturers instructions. Make sure mounting brackets do not interfere with battery wand.

Extended Life Battery Wand Installation

4) Follow previous instructions for mounting clips. Install the Extended Life Battery Wand closest to the motor. Install Optional Battery Wand adjacent to Extended Life Battery Wand. Connect battery wands with short connection cable.

WINDOW SHADINGS MOTORIZATION INSTALLATION INSTRUCTIONS

To operate your shadings complete the following instructions. Upon completion, point the remote control at the eye of the shadings you wish to operate.

Push remote button once to lower shading. Push remote button once to raise shading. Use the same procedure if operating the shading with manual button.

Battery Installation

Prior to installing the shading into the window . . .

Remove the batteries (6 AA lithium) from their packaging. Install the batteries into the battery holder.

